

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 529 900 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
20.11.1996 Bulletin 1996/47

(51) Int Cl.⁶: **F23R 3/26**, F02C 9/28,
F23R 3/12, F02C 7/228

(21) Application number: **92307489.2**

(22) Date of filing: **14.08.1992**

(54) **Gas turbine apparatus and method of control thereof**

Steuerungsverfahren einer Gasturbine

Turbine à gaz et méthode de contrôle

(84) Designated Contracting States:
CH DE FR GB IT LI

(30) Priority: **23.08.1991 JP 212367/91**

(43) Date of publication of application:
03.03.1993 Bulletin 1993/09

(73) Proprietor: **HITACHI, LTD.**
Chiyoda-ku, Tokyo 101 (JP)

(72) Inventors:

- **Iwata, Naohiko**
Hitachi-shi, Ibaraki 317 (JP)
- **Otawara, Yasuhiko**
Katsuta-shi, Ibaraki 312 (JP)
- **Shimura, Akira**
Hitachi-shi, Ibaraki 319-12 (JP)
- **Iizuka, Nobuyuki**
Hitachi-shi, Ibaraki 316 (JP)
- **Sato, Isao**
Hitachi-shi, Ibaraki 316 (JP)
- **Hirose, Fumiyuki**
Hitachi-shi, Ibaraki 317 (JP)
- **Takaba, Minoru**
Hitachi-shi, Ibaraki 319-14 (JP)
- **Komatsu, Yasutaka**
Hitachi-shi, Ibaraki 317 (JP)

- **Ikeda, Hiraku**
Katsuta-shi, Ibaraki 312 (JP)
- **Iwamiya, Takeshi**
Katsuta-shi, Ibaraki 312 (JP)
- **Ishida, Takeshi, Ayukawadai APT 13-202**
Hitachi-shi, Ibaraki 316 (JP)

(74) Representative: **Paget, Hugh Charles Edward et al**
MEWBURN ELLIS
York House
23 Kingsway
London WC2B 6HP (GB)

(56) References cited:

EP-A- 0 244 344	EP-A- 0 278 699
GB-A- 894 054	GB-A- 2 239 056
US-A- 4 138 842	US-A- 4 720 970
US-A- 5 024 055	

- **PATENT ABSTRACTS OF JAPAN** vol. 11, no. 21
(M-555)(2468) 21 January 1987 & JP-61 195 214
(HITACHI LTD) 29 August 1986
- **PATENT ABSTRACTS OF JAPAN** vol. 8, no. 94
(M-293)(1581) 28 April 1984 & JP-59 7 739
(HITACHI) 14 January 1984
- **PATENT ABSTRACTS OF JAPAN** vol. 00, no.
8258 (M-340) 27 November 1984 & JP-59 129 330
(HITACHI) 25 July 1984

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

This invention relates to gas turbine apparatus having a gas turbine and a plurality of burners which burn fuel in combustion air to supply combustion gases to drive the gas turbine. The invention is particularly concerned with the control of the burners, particularly the fuel-air ratio of the burner or of an individual stage of the burner, and thus also provides methods of control or operation of a gas turbine having a plurality of burners.

Large power output gas turbines are nowadays usually supplied with combustion gas by a plurality of burners, which are often arranged in a ring, with each burner supplying its combustion gas to a different part of the first stage of the turbine. A number of proposals for control of the burners in such an apparatus have been made in the prior art, and include methods of pre-setting the burners for operation, and also adjusting the burners collectively or even separately during operation. Such methods are generally concerned with control of the fuel-air ratio.

One arrangement for setting the fuel-air ratio of a pre-mixing combustion stage of a plurality of burners is described in JP-A-61-195214. A pre-mixing combustion stage is one in which the fuel and combustion air meet and pass along a passage in which they are pre-mixed before reaching a combustion zone. This device is illustrated in Figs. 7 to 9 of the accompanying drawings.

Fig. 8 shows the burners 3 arranged in a ring to supply combustion gases to one gas turbine 1, whose inlet stage 1a is seen in Fig. 7. Each burner 3 as shown in Fig. 8 includes a diffusion combustion chamber 7a in which diffusion combustion having high combustion stability is effected, and a pre-mixing combustion chamber 6a in which pre-mixing combustion having a high NO_x reduction ratio is effected. However, in the pre-mixing combustion, the combustion stability range is relatively narrow.

Diffusion fuel nozzles 9 for injecting a primary fuel F1 into the diffusion combustion chamber 7a are disposed at the upstream end of the diffusion combustion chamber 7a. Air A1 for the diffusion combustion enters through openings 7b. A pre-mixing gas formation chamber or passage 23 for pre-mixing a secondary fuel F2 and air A2, with pre-mixing fuel nozzles 19 for injecting the secondary fuel F2, is disposed at the upstream end of the pre-mixing combustion chamber 6a. A movable member 28 of an inter-flow control device (hereinafter referred to as "IFC") is disposed near the inlet of the pre-mixing chamber 23 in order to regulate the rate of the combustion air flowing into the chamber 23 from the space between a burner casing 18 and a transition piece 105 and between the burner casing 18 and a cylinder 6 bounding the pre-mixing combustion region 6a. The air is supplied into this space as a flow A from a compressor 1.

The IFC device comprises the movable member 28, an IFC opening setter 29a for determining the amount

of opening of the movable piece 28 and an IFC driving mechanism 17a for driving the movable member 28. One IFC opening setter 29a is provided for the plurality of burners 3. As shown in Figs. 8 and 9, the IFC driving mechanism 17a comprises a control ring 45 disposed around the outside of the annular ring of burners 3, a hydraulic cylinder 46 for rotating this control ring 45 and a lever link mechanism 47 for driving the movable member 28 of each burner 3 in accordance with the operation of the control ring 45. The movable member 28 of the IFC device and the lever link mechanism 47 are provided for each of the burners 3, but other parts are in common for all the burners 3. In Figs. 8 and 9, the arrows indicate the movement of the parts in the opening (O) and closing (C) directions.

As another means for adjusting the air distribution inside the burner, it is known to provide a bypass valve 104 for passing part of combustion air, supplied from the compressor to the gap between the gas turbine casing 18 and the transition piece 105, directly into the transition piece 105 as shown in Fig. 10. In the same way as in Figs. 7 to 9 described above, only one bypass valve opening setter 100a, one motor and one control ring 102, etc., constituting the bypass valve driving device 100a are provided, to control all the bypass valves 104 of all the burners 3a, respectively. A link mechanism 103 for driving the bypass valve 104 in accordance with the operation of the control ring 102 is arranged for each bypass valve 104.

As for control of the fuel-air ratio (the proportion of the fuel to air) in such a gas turbine equipment, the fuel-air ratio has been set to a constant value by changing the flow rate of air in accordance with the flow rate of the fuel that is predetermined for the operation of the gas turbine as described in JP-A-60-66020 for example. In this case, the air flow rate is determined only on the basis of the fuel flow rate which is in match with the gas turbine load. Determination of the air flow rate based on only the fuel flow rate has been practised in other gas turbine equipments.

In such conventional gas turbines one control ring 45, 102 is driven for a plurality of burners. Therefore, the control of the fuel-air ratio for each burner individually cannot be made.

A proposal for the separate control of each burner has been made in JP-A-59-7739, which shows fuel control for each burner performed, on the basis of the sensed temperature at the inlet to the first stage of the gas turbine. Each burner is controlled in dependence on the temperature pattern sensed all around the turbine, so as to minimize the temperature differences measured around the gas turbine, resulting from different performance of the burners, by means of feed back from the sensed temperatures. Overall improvement of the performance of the gas turbine, particularly in respect of a reduction of nitrogen oxide content in the exhaust gas and of stability of the burner operation, was not under consideration. This method also does not control

each burner in dependence on a performance characteristic thereof.

In US-A-5024055, there is described a device for gas turbine control in which sensors are provided at the outlet of the turbine, to detect the presence of unburned gas components in the exhaust gas. Such unburned components suggest that one or more of the burners is operating incorrectly or has blown out, and from the angular position of such unburned components, is possible to determine which burner is in such a condition. The proposal then is to adjust the flow rate of air and/or of fuel to the respective burner, in order to maintain the fuel flow rate above a certain minimum and the air flow rate below a certain maximum.

A proposal for separate control of two rings of burners on the basis of detected fuel calorific value has been made in EP-A-278699.

The present inventors have taken into consideration the fact that the parts which constitute each burner, for example the nozzles, the cylinders surrounding the combustion chambers, etc., vary in production and assembly, so that each burner has its own specific and particular inherent fuel-air ratio characteristics. It follows that the fuel-air ratio which is most suitable for one burner is not necessarily the most suitable for another burner, so that a given burner may not be operating at the most suitable fuel-air ratio for stable operation and for reduction of NO_x . It must be remembered that in the pre-mix combustion stage of a burner, which is the most efficient stage from the point of view of reduction of NO_x , there is a rather narrow stable combustion range, outside which the burner may tend to blow out. The present invention seeks to solve this problem, which was not appreciated in the prior art.

A first object of the invention is to provide a gas turbine apparatus and a method of controlling such an apparatus, in which stable operation of all of the burners is combined with a satisfactory level of NO_x reduction. Particularly the invention provides improved control of the fuel-air ratio in each burner among a plurality of burners supplying the gas turbine is achieved.

In a first aspect, the invention provides apparatus as set out in claim 1 and a method as set out in claim 6. Preferably the control of the fuel and/or air flow to the burners is effected individually for each burner, in dependence on at least one predetermined combustion characteristic of each burner. The combustion characteristic of each burner is determined in advance, and is specific for the burner. The combustion characteristic relates the fuel or air flow rate to the burner to a specific variable quantity related to the combustion performance of the burner. The measure of combustion performance may for example be the flame temperature in the combustion chamber of the burner. The specific quantity related to this performance may be a quantity which is the same for all the burners, e.g. the calorific value of the fuel, the humidity of the combustion air or the NO_x content of the exhaust gas of the turbine. Alternatively, the

quantity related to the combustion performance may be specific for the burner, and may be sensed individually for each burner, such as the actual combustion air flow rate of at least one stage of the burner, the combustion pressure in the burner (or the pressure fluctuation which is related to the stability of combustion), the combustion temperature itself, the temperature of a vortex-forming flame stabilization device at the outlet of a pre-combustion mixing passage, or temperature at the inlet of the turbine. This is not an exclusive list of the quantities which may be employed in the present invention.

By individual control of each burner in accordance with a combustion characteristic which is specific for the burner, each burner can be made to operate within its stable operation range and to achieve efficient combustion and for low NO_x production.

It has been found that control in dependence upon at least two sensed quantities leads to improved burner performance from the point of view of stability and NO_x reduction.

The present inventors have also found that certain quantities relating to the performance of the burners are particularly suited for the individual control of the burners, to improve performance. In accordance with the invention in one aspect, the flame temperature in a combustion chamber of each burner is sensed, and the burners are adjusted individually in accordance with the sensed values of flame temperature towards a predetermined optimum for each burner. In another aspect, in accordance with the invention the temperature of a vortex-forming flame stabilization device provided at the outlet end of a premixing passage or chamber in a premixing combustion stage of each burner is sensed and each burner is individually controlled in dependence upon the sensed value of this temperature. It has been found that this temperature of the flame stabilization device is particularly critical for flame stability.

In yet another aspect of the invention, there is provided separate control of two combustion stages of the burners of the gas turbine apparatus, in particular control of air-fuel ratio of the two stages, in accordance with the value of at least two sensed quantities relating to the combustion performance of the burners. The two combustion stages may be a diffusion combustion stage and a pre-mixing combustion stage, or even two pre-mixing combustion stages where these are provided in the burners. The two combustion stages are controlled separately, but not completely independently since the overall amount of fuel burned is determined by the load of the gas turbine. Improved operation of both combustion stages can be obtained in this manner.

Embodiments of the invention will now be described by way of non-limitative example, with reference to the accompanying drawings, in which:-

Fig. 1 is a diagram showing the control system of a gas turbine which is a first embodiment of the present invention.

Fig. 2 is a diagram of one burner of the gas turbine

of Fig. 1.

Fig. 3 is a diagrammatic sectional view of the portion of the burner of the first embodiment shown in Fig. 2.

Fig. 4 is a view, similar to that of Fig. 2, of a burner and its control, in an alternative embodiment of the invention.

Fig. 5 is a diagram of one burner of a gas turbine which is a third embodiment of the present invention.

Fig. 6 is a control block diagram for a gas turbine which is a fourth embodiment of the present invention.

Fig. 7 is a diagrammatic sectional view of a burner disclosed in the prior art.

Fig. 8 is a rear view of the burners of the prior art gas turbine.

Fig. 9 is a diagrammatic sectional view of another prior art burner of a gas turbine.

Various embodiments of the present invention will be explained below with reference to Figs. 1 to 6. In the illustration and explanation of each embodiment, the same reference numeral will be used for the same or equivalent parts and the repetition of explanation will be omitted.

A first embodiment of a gas turbine according to the present invention will be explained with reference to Figs. 1 to 3. As shown in Fig. 1, the gas turbine apparatus of this embodiment comprises a gas turbine 2 having a plurality of burners 3, for supplying burned gas to this gas turbine 2, a compressor 1 for supplying compressed air to the plurality of burners 3, and a controller for controlling each device. As shown for example in Fig. 7, the burners 3 are arranged in a ring around the turbine 2 and supply the burned gases to the first stage of the turbine.

Each burner 3 is a two-stage combustion system burner for effecting diffusion combustion at its upstream side and effecting pre-mixing combustion on its downstream side. These modes of combustion are known. As shown in Figs. 2 and 3, the burner 3 comprises a burner casing 18, an inner cylinder 7 for diffusion combustion which defines a diffusion combustion chamber 7a, an inner cylinder 6 for pre-mixing combustion which defines a pre-mixing combustion chamber 6a, a transition piece 105 for guiding the burned gas produced inside these inner cylinders 6, 7 to the moving blades of the gas turbine 2, diffusion fuel nozzles 9, for injecting a primary fuel F1 into the diffusion combustion chamber 7a, a pre-mixing gas formation chamber 23 for pre-mixing a secondary fuel F2 with combustion air A2, pre-mixing fuel nozzles 19 for injecting the secondary fuel F2 into the pre-mixing gas formation chamber 23, and a movable member 28 for regulating the flow rate of pre-mixing combustion air which is supplied into the pre-mixing gas formation chamber 23 via the inlet 23b.

The burner casing 18 is provided with a flange 20 which divides the burner casing 18 into an upstream part and a downstream part and connects these parts with each other. As shown in Fig. 3, a secondary fuel passage 20b through which the secondary fuel F2 flows and

a fuel manifold 20a for distributing the secondary fuel F2 flowing through the secondary fuel passage 20b into a plurality of pre-mixing fuel nozzles 19, are formed in the flange 20.

A flame stabilizing device 21 in the form of a small flange which forms a vortex circulation flow of the combustion gas on the downstream side of itself for stabilizing the pre-mixing combustion is disposed near a pre-mixing gas jet port 23a of the pre-mixing gas formation chamber 23. This pre-mixing gas formation chamber 23 has an annular shape, and a seal spring 24 for sealing the gap between this chamber 23 and the pre-mixing combustion inner cylinder 6 is disposed around the outer periphery of the chamber 23. A seal spring 25 for sealing the gap between the chamber 23 and the diffusion combustion inner cylinder 7 is disposed around the inner periphery of the chamber 23. A swirl plate 22 for swirling the gas passing through the chamber 23 and for mixing the secondary fuel F2 with the pre-mixing combustion air A2 is disposed next to the pre-mixing gas jet port 23a inside the pre-mixing gas formation chamber 23.

An IFC driving device 17 for driving the movable member 28 is connected to the member 28. This IFC driving device 17 is controlled by an IFC controller 42. As shown in Fig. 3, the IFC driving device 17 comprises an AC servo motor 17a, a servo amplifier 17b, a transmission mechanism 17c (e.g. screw mechanism) for converting the rotation of the motor 17a to linear motion and transmitting this motion to the moving member 28 and a differential convertor 17f for detecting the position of the movable member 28 and feeding it back to the IFC controller 42. Instead of the A.C. servo motor 17a, another electric motor such as a D.C. servo motor, a stepping motor, or a linear motor, a hydraulic device such as a hydraulic cylinder, or a hydraulic motor, or a pneumatic device such as an air cylinder, or an air motor, can be used as the driving means of the moving member 28.

As shown in Fig. 3, each burner 3 is provided with a flow velocity meter 34 for measuring the flow velocity of the pre-mixing combustion air A2 inside the pre-mixing gas formation chamber 23, a thermometer 35 for measuring the temperature of the flame stabilizing device 21, a pressure gauge 36 for measuring the pressure near the pre-mixing gas jet port 23a of the pre-mixing gas formation chamber 23 and a thermometer 37 for measuring the temperature of the pre-mixing flame. As shown in Fig. 2, the gas turbine 2 is provided with a thermometer 38 for measuring the temperature of fixed blades at the entry to the gas turbine downstream of each burner 3, a thermometer 39 for measuring the first stage gas temperature downstream of each burner 3, a plurality of thermometers 40, for measuring the circumferential temperature distribution inside the gas turbine 2 on the downstream side thereof and an NO_x meter 41 for measuring the NO_x value at the outlet of the gas turbine 2.

As shown in Fig. 1, the IFC controller 42 includes

an IFC opening setter 29 for determining a reference air flow rate from a reference function of a fuel flow rate necessary for the desired gas turbine load on the basis of a fuel instruction signal representing the gas turbine load so as to set the reference opening value of the movable member 28. The controller 42 also has a plurality of opening correctors 31a, 31b etc. for correcting this reference opening value in dependence on various sensed quantities. An opening corrector 31a determines a correction of the reference opening value of the member 28 on the basis of a measured fuel calorific value 30. An opening corrector 31b determines a correction of the reference opening value on the basis of the humidity of the combustion air measured by an atmosphere hygrometer 33. A corrector 31c determines a correction of the reference opening value on the basis of the flow velocity of the pre-mixing combustion air A2 measured by the flow velocity meter 34. A corrector 31d determines a correction of the reference opening value on the basis of the temperature of the flame stabilizing device 21 measured by the thermometer 35. A corrector 31e determines a correction of the reference opening value on the basis of the combustion pressure measured by the pressure gauge 36, that is, on the basis of the frequency and amplitude of the combustion vibration. A corrector 31f determines a correction of the reference opening value on the basis of the temperature of the pre-mixing flame measured by the thermometer 37. A corrector 31g determines a correction of the reference opening value on the basis of the temperature of the fixed blades measured by the thermometer 38. A corrector 31h determines a correction of the reference opening value on the basis of the first stage gas temperature measured by the thermometer 39. A corrector 31i determines a correction of the reference opening value on the basis of the temperature distribution on the downstream side inside the gas turbine 2 measured by the thermometers 40. A corrector 31j determines a correction of the reference opening value on the basis of the NO_x value at the outlet of the gas turbine 2 measured by the NO_x meter 41.

Each opening corrector 31a ... 31f has stored in it a predetermined characteristic of the burner 3, which relates the variation of the respective sensed quantity to the pre-mixing air flow rate. Thus the correction performed to the opening value of the member 28 by each respective corrector 31a ... 31f is aimed to optimize the respective sensed quantity for optimal performance of the burner. Adders 32a, 32b, ..., 32j add the corrections outputted from these correctors 31a, ..., 31j to the reference opening value of the movable member 28.

One of these IFC controllers 42 and IFC driving devices 17 are provided for each burner 3.

In this embodiment, flow rate calculation means comprises the IFC controller 42 which indirectly determines the flow rate of the pre-mixing combustion air A2, and the flow regulation means comprises the movable member 28 and the IFC driving device 17. Reference fuel-air ratio setting means comprises the IFC opening

setter 29 which indirectly determines the reference fuel-air ratio, and correction means comprises correctors 31a, ..., 31j and adders 32a, ..., 32j.

Next, the operation of this embodiment will be explained.

When the fuel instruction signal is outputted, the valve opening of each of fuel flow rate regulation valves 8a, 8b of the burners 3, is set so that the fuel whose flow rate corresponds to the turbine load represented by the fuel instruction signal is supplied to each burner 3.

In the IFC controller 42 of each of the burners 3, on the other hand, the IFC opening setter 29 which receives the fuel instruction signal determines the reference air quantity from the reference function of the fuel flow rate necessary for the gas turbine load and sets the reference opening value of the member 28. The correctors 31a, ..., 31j and the adders 32a, ..., 32j correct this reference opening value and output the corrected opening value to the IFC driving device 17.

The IFC driving device 17 moves the movable member 28 on the basis of this corrected opening value, and the pre-mixing combustion air A2 enters the pre-mixing gas formation chamber 23 at an optimum flow rate.

To stably burn the fuel and to limit NO_x to a low level, it is necessary to employ accurately control variables such as the properties of the fuel, weather, combustion state, and so forth. Since this embodiment measures the calorific power of the fuel, the humidity of the atmosphere, the NO_x value, etc, as described above and controls the opening value of the member 28 on the basis of these values, stable combustion can be accomplished and the reduction of NO_x can be attained. The measured quantities are the same for all the burners 3, of course. More specifically, if the combustion ratio of the fuel decreases during the operation due to the change of the atmospheric humidity, for example, the reference movable piece opening increases, so that blow-out can be prevented. When the fuel ratio of the fuel increases because of the change of the atmospheric humidity, the reference movable piece opening decreases, so that NO_x is limited to a lower level and back-firing can be prevented, as well.

In this embodiment, the movable member opening value is corrected for each burner 3, on the basis of the flow velocity of the pre-mixing combustion air A2, the temperature of the flame stabilizing device 21, the temperature of the pre-mixing flame, the temperature of the fixed blades of the turbine, the temperature of the first stage, etc, that are all measured for each burner 3, and the pre-mixing combustion air A2 is supplied at an optimum flow rate to each burner 3. Accordingly, the pre-mixing combustion air A2 can be supplied in accordance with the difference of performance of the individual burners 3. For this reason, optimum control can be achieved for each burner 3, and stable combustion and low NO_x combustion can be accomplished by all the burners.

In this embodiment, it is preferred that diffusion combustion is mainly effected at the start-up of the tur-

bine, and pre-mixing combustion is mainly effected during the steady operation at above a specific load. Therefore, increase in NO_x hardly occurs even when the flow rate of the diffusion combustion air A1 supplied to the diffusion combustion chamber 7a is not corrected, in the same manner as the pre-mixing air flow rate, as described above.

The flow-controlling member 28 is relatively small. Unlike the prior art technique construction described above, this embodiment does not use a control ring which is common for all burners and therefore is large in scale, has a large inertia and has a large thermal expansion and does not use a complicated link mechanism for connecting the control ring to the movable piece. Therefore, this embodiment can provide improved accuracy of positioning of the movable piece and the control response characteristics.

Though this above embodiment illustrates the case where the present invention is applied to the two-stage combustion system burner, the present invention can of course be applied to a single stage burner or burners having three or more stages.

Though the above embodiment corrects only the flow rate of the pre-mixing combustion air supplied to the pre-mixing gas formation chamber 23, the flow rate of the diffusion combustion air A1 supplied to the diffusion combustion chamber 7a may also be corrected in an analogous manner. Fig. 4 illustrates this embodiment and additionally the case where there are two premixing combustion stages having separate air-flow control in accordance with the invention.

In Fig. 4, a ring-shaped movable member 28a, similar to the movable member 28 and moved by a similar mechanism 17a is arranged to control the air flow rate for the diffusion combustion stage, i.e. the air flow rate to the inner cylinder 7. The opening value of the member 28a is calculated and set by the IFC controller 42a, which is similar in principle to the IFC controller 42 for the pre-mixing combustion air flow rate control. The controller 42a receives as input information the desired fuel supply rate signal and determines the opening value for the member 28a from that and from sensed information relating to the actual performance of the burner 3. The inputs of sensed information to the controller 42a are generally the same as to the controller 42 of Figs. 1 and 4, adapted to the fact that the diffusion combustion air flow is controlled in this case. The sensors required are not shown in Fig. 4. The diffusion combustion air flow rate of each burner 3 of the gas turbine is controlled individually in this manner.

In the embodiment of Figs. 1 - 3, there is one IFC controller 42 for each burner 3, and in Fig. 4 two IFC controllers 42, 42a for each burner. Suitably, the IFC controller is data processing means. It is alternatively possible to use one computer instead of these IFC controllers 42, 42a for example, and to set the movable member opening values for the burners 3, individually using the single computer.

Fig. 4 also shows that in this embodiment there are two premixing combustion stage fuel flows F2a and F2b, for the two premixing combustion stages respectively. The flow passages and burner nozzles etc. for the first premixing combustion stage (fuel flow F2a) are not shown, but this stage has a controller operating in the same manner as the controller 42 of Fig. 1. The controller 42 shown in Fig. 4 for the fuel flow F2b for the second premixing combustion stage is identical to the corresponding controller 42 of Fig. 1.

Next, a third embodiment of the gas turbine according to the present invention will be explained with reference to Fig. 5. In this construction, for changing the distribution of air inside the burner 3, a bypass valve 104 is arranged to send part of the combustion air supplied to the space between the burner casing 18 and the transition piece 105 into the transition piece 105, and this bypass valve 104 changes the fuel-air ratio inside the transition piece 105.

In this embodiment, a bypass valve opening setter 100 and a bypass valve driving device 101 are provided for each burner 3a of the plurality of burners 3a of the gas turbine, and the flow rate of excess air A3 supplied into the transition piece 105 through the bypass valve 104 is regulated individually for each burner 3a. In this case also therefore, excess air A3 can be supplied to each burner 3a, at the appropriate flow rate regulated for each burner 3a.

The by-pass valve opening setter 100 controls the driving device 101 in dependence on the fuel supply signal F and also on a plurality of sensed conditions 30, 33-41 relating to the performance of the burner. These sensed conditions 30, 33-41 are the same as in the embodiment of Figs. 1-3, and the calculation of the opening value of the valve 104 is performed in an analogous manner, in dependence on known characteristics of each individual burner.

The foregoing embodiments are the cases where only the flow rate of combustion air is regulated in order to adjust the fuel-air ratio. However, in alternative embodiments, only the fuel flow rate may be regulated or the flow rate of combustion air and the fuel flow rate may be regulated in a similar manner for each burner. The case where only the fuel flow rate is regulated will be explained as the fourth embodiment shown in Fig. 6. Fig. 6 illustrates the control of the fuel flow rates to the pre-mixing fuel nozzles 19 and to the diffusion nozzles 9, in a burner of the same construction as shown in Figs. 1-3.

In this embodiment, a reference opening setter 120 for setting a reference opening value of a pre-mixing fuel flow rate regulating valve 8a and a diffusion fuel flow rate regulating valve 8b is provided for each burner 3, and two opening correctors 121a, 121b are disposed for correcting the reference opening value for each regulating valve 8a, 8b which is set by this reference opening setter 120. Data relating to each regulating valve 8a, 8b and the differences of the components of the fuel are in advance set in each opening corrector 121a, 121b. The

opening corrector 121a adjusts the fuel flow rate setting to the nozzles 19 in dependence on the same sensed characteristics 30, 33-41 as in the embodiment of Fig. 1, as well as the known performance characteristics of the burner 3. Likewise, the opening corrector 121b adjusts the fuel flow rate setting to the nozzles 9 in dependence on inputs relating to sensed conditions relating to the actual performance of the burner and predetermined characteristics of the burner, similar to the inputs to the opening corrector 121a but adapted to the diffusion combustion stage.

The IFC opening setter 29a and the IFC driving device 17a used in this embodiment for the air flow rate to the pre-mixing combustion are the same as those of the prior art. In other words, the IFC opening setter 29a determines indiscriminately the IFC opening without discriminating among the burners 3, and the IFC driving device 17a is equipped with a control ring for non-discriminately moving the movable member 28 of each burner 3.

Fig. 6 shows also the reference opening setter 120' and the opening correctors 121a', 121b' for the fuel valves 8a', 8b' of a second burner of the same gas turbine, which is controlled in the same manner.

In the embodiment, the fuel can be supplied at the optimum flow rate to each burner 3, individually and for each stage of each burner individually. This embodiment can achieve fundamentally the same effect as that of the first embodiment due to the provision of the reference opening setter 120 and the opening correctors 121a, 121b. Therefore, removal of the common control ring for the pre-mixing combustion, etc, is not necessary, so that modification cost can be lower than in the first embodiment when the present invention is applied to existing equipment.

According to the present invention, therefore, the supply flow rate(s) of the combustion air and/or of the fuel can be regulated optimally for each burner. Therefore, the combustion of each burner can take place under most suitable conditions. Since the fuel-air ratio is corrected on the basis of various external factors, combustion can be accomplished at a suitable fuel-air ratio corresponding to the variation of the external factors and to the individual difference of each portion of the burner. Accordingly, stable and low NO_x combustion can be achieved.

Claims

1. A gas turbine apparatus having a gas turbine (2), a plurality of burners (3) for providing combustion gas to drive said turbine, flow control means (8a, 8b, 17, 17a, 28, 28a, 105) of each said burner for at least one of fuel and combustion air, sensing means (30, 33-41) for sensing a quantity relating to the combustion performance of said burners, and control means (42, 42a) for adjusting said flow control

means of said burners individually in dependence on said quantity characterized in that said sensing means comprises means (30, 33-41) for sensing at least two quantities relating to the combustion performance of said burners, and said control means (42, 42a) is adapted and arranged to adjust said flow control means of each said burner individually in dependence on at least two of said sensed quantities.

2. A gas turbine apparatus according to claim 1 wherein said control means (42, 42a) adjusts said flow control means of each said burner individually in dependence on a predetermined combustion characteristic of each respective burner.
3. A gas turbine apparatus according to claim 1 or claim 2, wherein said at least two sensed quantities are selected from
 - calorific value of fuel being fed to said burners,
 - humidity of combustion air being fed to said burners,
 - nitrogen oxide concentration downstream of said gas turbine,
 - combustion air flow rate of at least one combustion stage of the respective burner,
 - temperature of a vortex-forming flame stabilizing device (21) at the outlet of a pre-mixing passage (23) of the respective burner,
 - combustion pressure in the respective burner,
 - flame temperature in the respective burner,
 - fixed blade temperature of said gas turbine downstream of the respective burner,
 - gas temperature at a first stage of said gas turbine downstream of the respective burner, and
 - exhaust gas temperature resulting from the respective burner.
4. A gas turbine apparatus having a gas turbine (2) and a plurality of burners (3) for providing combustion gas to drive said turbine, flow control means (8a, 8b, 17, 17a, 28, 28a, 105) of each said burner for at least one of fuel and combustion air, each said burner having a plurality of combustion stages comprising a first combustion stage and a second combustion stage, and said apparatus further having sensing means (30, 33) for sensing a quantity relating to the combustion performance of said burners and control means (42, 42a) for controlling said burners individually in dependence on sensed behaviour of the respective burner and for controlling said first combustion stage and said second combustion stage, characterized in that said sensing means comprises means (30, 33-41) for sensing at least two quantities relating to the combustion performance of said burners, said control means (42, 42a) is adapted and arranged to control said combustion stage and said second combustion

stage separately in dependence on sensed values of said at least two said quantities.

5. A gas turbine apparatus according to claim 4, wherein said plurality of combustion stages comprises a diffusion combustion stage and at least one fuel and combustion air pre-mixing combustion stage.

6. A method of controlling a gas turbine apparatus having a gas turbine (2) and a plurality of burners (3) supplying combustion gases thereto, comprising controlling at least one of fuel and combustion air supply to said burners individually in dependence on sensed behaviour of the respective burner, characterized by during operation sensing at least two quantities relating to combustion performance of said burners and controlling each said burner individually in dependence on the sensed values of said two quantities.

7. A method according to claim 6 wherein at least one of fuel and combustion air supply to each said burner is controlled in dependence on a predetermined combustion characteristic of the respective burner.

8. A method according to claim 6 or claim 7, wherein said at least two sensed quantities are selected from

calorific value of fuel being fed to said burners, humidity of combustion air being fed to said burners, nitrogen oxide concentration downstream of said gas turbine, combustion air flow rate of at least one combustion stage of each said burner, temperature of a vortex-forming flame stabilizing device (21) at the outlet of a pre-mixing passage (23) of each said burner, combustion pressure in each said burner, flame temperature in each said burner, fixed blade temperature of said gas turbine downstream of each said burner, gas temperature at a first stage of said gas turbine downstream of each said burner, and exhaust gas temperature resulting from each said burner.

9. A method of controlling a gas turbine apparatus having a gas turbine (2) and a plurality of burners (3) supplying combustion gases thereto, wherein each said burner has at least a first combustion stage and a second combustion stage, said method comprising during operation sensing a quantity related to combustion performance of said burners, controlling each said burner individually in dependence on sensed behaviour of the respective burner,

and adjusting said first and second combustion stages of said burners separately on the basis of said sensed quantity, characterized by during operation sensing at least two quantities relating to combustion performance of said burners and controlling each said combustion stage in dependence on the sensed values of said two quantities.

10 Patentansprüche

1. Gasturbinenvorrichtung mit einer Gasturbine (2), einer Vielzahl von Brennern (3) zur Bereitstellung von Verbrennungsgas zum Antreiben der Turbine, einer Einrichtung (8a, 8b, 17, 17a, 28, 28a, 105) für jeden Brenner zum Steuern des Zuflusses von Kraftstoff und/oder Verbrennungsluft, Sensoreinrichtungen (30, 33 - 41) zum Abtasten einer auf den Verbrennungswirkungsgrad der Brenner bezogenen Größe und Steuereinrichtungen (42, 42a) zum Einstellen der Zuflußsteuereinrichtungen der Brenner individuell in Abhängigkeit der Größe,

dadurch gekennzeichnet, daß die Sensoreinrichtung eine Einrichtung (30, 33 - 41) zum Abtasten wenigstens zweier auf den Verbrennungswirkungsgrad der Brenner bezogenen Größen aufweist und die Steuereinrichtung (42, 42a) angepaßt und angeordnet ist, um die Zuflußsteuereinrichtung von jedem Brenner individuell in Abhängigkeit von wenigstens zwei der abgetasteten Größen einzustellen.

2. Gasturbinenvorrichtung nach Anspruch 1, **dadurch gekennzeichnet**, daß die Steuereinrichtung (42, 42a) die Zuflußsteuereinrichtung von jedem Brenner individuell in Abhängigkeit eines vorbestimmten Verbrennungsverhaltens des jeweiligen Brenners einstellt.

3. Gasturbinenvorrichtung nach Anspruch 1 oder 2, **dadurch gekennzeichnet**, daß die wenigstens zwei abgetasteten Größen aus

dem Heizwert des den Brennern zugeführten Kraftstoffes, der Feuchtigkeit der den Brennern zugeführten Verbrennungsluft, der Stickstoffoxidkonzentration stromabwärtig der Gasturbine, der Verbrennungsluft-Durchflußrate von wenigstens einer Verbrennungsstufe des jeweiligen Brenners, der Temperatur einer Wirbel bildenden, Flammen stabilisierenden Vorrichtung (21) am Ausgang eines Vormischdurchganges (23) des jeweiligen Brenners, dem Verbrennungsdruck in dem jeweiligen Brenner, der Flammentemperatur in dem jeweiligen

- Brenner,
der Temperatur der feststehenden Blätter der Gasturbine stromabwärtig des jeweiligen Brenners,
der Gastemperatur an einer ersten Stufe der Gasturbine stromabwärtig des jeweiligen Brenners und
der von dem jeweiligen Brenner herrührenden Abgastemperatur ausgewählt werden.
4. Gasturbinenvorrichtung mit einer Gasturbine (2), einer Vielzahl von Brennern (3) zur Bereitstellung von Verbrennungsgas zum Antreiben der Turbine, einer Einrichtung (8a, 8b, 17, 17a, 28, 28a, 105) für jeden Brenner zum Steuern des Zuflusses von Kraftstoff und/oder Verbrennungsluft, wobei jeder Brenner eine Vielzahl von Verbrennungsstufen mit einer ersten Verbrennungsstufe und einer zweiten Verbrennungsstufe aufweist, und die Vorrichtung ferner Sensoreinrichtungen (30, 33) zum Abtasten einer auf den Verbrennungswirkungsgrad der Brenner bezogenen Größe und Steuereinrichtungen (42, 42a) zum Einstellen der Brenner individuell in Abhängigkeit des abgetasteten Verhaltens des jeweiligen Brenners und zum Steuern der ersten Verbrennungsstufe und der zweiten Verbrennungsstufe enthält, **dadurch gekennzeichnet**, daß die Sensoreinrichtung eine Einrichtung (30, 33 - 41) zum Abtasten von wenigstens zwei auf den Verbrennungswirkungsgrad der Brenner bezogenen Größen aufweist, wobei die Steuereinrichtung (42, 42a) angepaßt und angeordnet ist, um die erste Verbrennungsstufe und die zweite Verbrennungsstufe getrennt in Abhängigkeit der abgetasteten Werte der wenigstens zwei Größen zu steuern.
5. Gasturbinenvorrichtung nach Anspruch 4, **dadurch gekennzeichnet**, daß die Vielzahl von Verbrennungsstufen eine Diffusionsverbrennungsstufe und wenigstens eine Kraftstoff/Verbrennungsluft-Vormischverbrennungsstufe aufweist.
6. Verfahren zum Steuern einer Gasturbinenvorrichtung mit einer Gasturbine (2) und einer Vielzahl von Brennern (3), die dieser Verbrennungsgase zuführen, das ein Steuern einer Kraftstoff- und/oder eine Verbrennungsluftzufuhr zu den Brennern individuell in Abhängigkeit des abgetasteten Verhaltens des jeweiligen Brenners enthält, **gekennzeichnet durch** ein Abtasten wenigstens zweier auf den Verbrennungswirkungsgrad der Brenner bezogenen Größen und ein Steuern jedes Brenners individuell in Abhängigkeit von den gemessenen Werten der zwei Größen während des Betriebs.
7. Verfahren nach Anspruch 6, **dadurch gekennzeichnet**, daß eine Kraftstoff- und/oder eine Verbrennungsluftzufuhr zu jedem Brenner in Abhängigkeit eines vorbestimmten Verbrennungsverhaltens des jeweiligen Brenners gesteuert wird.
8. Verfahren nach Anspruch 6 oder 7, **dadurch gekennzeichnet**, daß die wenigstens zwei abgetasteten Größen aus
dem Heizwert des den Brennern zugeführten Kraftstoffes,
der Feuchtigkeit der den Brennern zugeführten Verbrennungsluft,
der Stickstoffoxidkonzentration stromabwärtig der Gasturbine,
der Verbrennungsluftdurchflußrate von wenigstens einer Verbrennungsstufe des jeweiligen Brenners,
der Temperatur einer Wirbel bildenden, Flammen stabilisierenden Vorrichtung (21) am Ausgang eines Vormischdurchganges (23) des jeweiligen Brenners,
dem Verbrennungsdruck in dem jeweiligen Brenner,
der Flammentemperatur in dem jeweiligen Brenner,
der Temperatur der feststehenden Blätter der Gasturbine stromabwärtig des jeweiligen Brenners,
der Gastemperatur an einer ersten Stufe der Gasturbine stromabwärtig des jeweiligen Brenners und
der von dem jeweiligen Brenner herrührenden Abgastemperatur ausgewählt werden.
9. Verfahren zum Steuern einer Gasturbinenvorrichtung mit einer Gasturbine (2) und einer Vielzahl von Brennern (3), die dieser Verbrennungsgase zuführen, wobei jeder Brenner wenigstens eine erste Verbrennungsstufe und eine zweite Verbrennungsstufe aufweist, und das Verfahren während des Betriebs ein Abtasten einer auf den Verbrennungswirkungsgrad der Brenner bezogenen Größe, ein Steuern jedes Brenners individuell in Abhängigkeit des abgetasteten Verhaltens des jeweiligen Brenners und ein getrenntes Einstellen der ersten und der zweiten Verbrennungsstufe der Brenner auf der Grundlage der abgetasteten Größe beinhaltet, **gekennzeichnet durch** ein Abtasten wenigstens zweier auf den Verbrennungswirkungsgrad der Brenner bezogenen Größen und ein Steuern jeder Verbrennungsstufe in Abhängigkeit von den abgetasteten Werten der zwei Größen während des Betriebs.

55 Revendications

1. Dispositif à turbine à gaz comportant une turbine à gaz (2), plusieurs brûleurs (3) pour fournir des gaz

- de combustion pour entraîner ladite turbine, des moyens de commande d'écoulement (8a, 8b, 17, 17a, 28, 28a, 105) de chacun desdits brûleurs pour commander au moins un élément parmi le carburant et l'air de combustion, des moyens de détection (30, 33 - 41) pour détecter une quantité relative à la performance de combustion desdits brûleurs, et des moyens de commande (42, 42a) pour régler de manière individuelle lesdits moyens de commande d'écoulement desdits brûleurs en fonction de ladite quantité, caractérisé en ce que lesdits moyens de détection comportent des moyens (30, 33 - 41) pour détecter au moins deux quantités relatives à la performance de combustion desdits brûleurs, et lesdits moyens de commande (42, 42a) sont adaptés et agencés pour régler individuellement lesdits moyens de commande d'écoulement de chacun desdits brûleurs en fonction d'au moins deux desdites quantités détectées.
2. Dispositif à turbine à gaz selon la revendication 1 dans lequel lesdits moyens de commande (42, 42a) règlent individuellement lesdits moyens de commande d'écoulement de chacun desdits brûleurs en fonction d'une caractéristique de combustion prédéterminée de chaque brûleur respectif.
3. Dispositif à turbine à gaz selon la revendication 1 ou 2, dans lequel lesdites au moins deux quantités détectées sont sélectionnées à partir de
- la valeur calorifique du carburant acheminé vers lesdits brûleurs
 - l'humidité de l'air de combustion acheminé vers lesdits brûleurs,
 - la concentration en oxyde d'azote en aval de ladite turbine à gaz,
 - le débit d'air de combustion d'au moins un étage de combustion du brûleur respectif,
 - la température d'un dispositif de stabilisation de flamme formant vortex (21) existant au niveau de la sortie d'un passage de prémélange (23) du brûleur respectif,
 - la pression de combustion dans le brûleur respectif,
 - la température de flamme dans le brûleur respectif,
 - la température de l'aube fixe de ladite turbine à gaz en aval du brûleur respectif,
 - la température de gaz existant au niveau d'un premier étage de ladite turbine à gaz en aval dudit brûleur respectif, et
 - la température des gaz d'échappement résultant du brûleur respectif.
4. Dispositif à turbine à gaz comportant une turbine à gaz (2) et plusieurs brûleurs (3) pour fournir des gaz de combustion pour entraîner ladite turbine, des moyens de commande d'écoulement (8a, 8b, 17, 17a, 28, 28a, 105) de chacun desdits brûleurs pour commander au moins un élément parmi le carburant et l'air de combustion, chacun desdits brûleurs ayant plusieurs étages de combustion comportant un premier étage de combustion et un second étage de combustion, et ledit dispositif comportant en outre des moyens de détection (30, 33) pour détecter une quantité relative à la performance de combustion desdits brûleurs et des moyens de commande (42, 42a) pour commander lesdits brûleurs de manière individuelle en fonction du comportement détecté du brûleur respectif et pour commander ledit premier étage de combustion et ledit second étage de combustion, caractérisé en ce que lesdits moyens de détection comportent des moyens (30, 33 - 41) pour détecter au moins deux quantités relatives à la performance de combustion desdits brûleurs, lesdits moyens de commande (42, 42a) sont adaptés et agencés pour commander séparément ledit premier étage de combustion et ledit second étage de combustion en fonction des valeurs détectées desdites au moins deux quantités.
5. Dispositif à turbine à gaz selon la revendication 4, dans lequel lesdits plusieurs étages de combustion comportent un étage de combustion de diffusion et au moins un étage de combustion de prémélange de carburant et d'air de combustion.
6. Procédé de commande d'un dispositif à turbine à gaz comportant une turbine à gaz (2) et plusieurs brûleurs (3) qui alimentent des gaz de combustion vers celle-ci, comportant la commande individuelle d'au moins une des alimentations en carburant et en air de combustion vers lesdits brûleurs en fonction du comportement détecté du brûleur respectif, caractérisé en ce que pendant le fonctionnement on détecte au moins deux quantités relatives à la performance de combustion desdits brûleurs et on commande individuellement chacun desdits brûleurs en fonction des valeurs détectées desdites deux quantités.
7. Procédé selon la revendication 6, dans lequel au moins une des alimentations en carburant et en air de combustion vers chacun desdits brûleurs est commandée en fonction d'une caractéristique de combustion prédéterminée du brûleur respectif.
8. Procédé selon la revendication 6 ou 7, dans lequel lesdites au moins deux quantités détectées sont sélectionnées à partir de
- la valeur calorifique du carburant acheminé vers lesdits brûleurs
 - l'humidité de l'air de combustion acheminé vers lesdits brûleurs,

la concentration en oxyde d'azote en aval de ladite turbine à gaz,

le débit d'air de combustion d'au moins un étage de combustion de chacun desdits brûleurs,

la température d'un dispositif de stabilisation de flamme formant Vortex (21) existant au niveau 5

de la sortie d'un passage de prémélange (23) de chacun desdits brûleurs,

la pression de combustion dans chacun desdits brûleurs, 10

la température de flamme dans chacun desdits brûleurs,

la température de l'aube fixe de ladite turbine à gaz en aval de chacun desdits brûleurs,

la température de gaz existant au niveau d'un premier étage de ladite turbine à gaz en aval 15

de chacun desdits brûleurs, et

la température des gaz d'échappement résultant de chacun desdits brûleurs, 20

9. Procédé de commande d'un dispositif à turbine à gaz ayant une turbine à gaz (2) et plusieurs brûleurs (3) qui alimentent des gaz de combustion vers celle-ci, dans lequel chacun desdits brûleurs a au moins

un premier étage de combustion et un second étage de combustion ledit procédé consistant à, pendant 25

le fonctionnement, détecter une quantité concernant la performance de combustion desdits brû-

leurs, commander individuellement chacun desdits brûleurs en fonction du comportement détecté du 30

brûleur respectif; et régler séparément lesdits premier et second étages de combustion desdits brû-

leurs sur la base de ladite quantité détectée, caractérisé en ce que pendant le fonctionnement on dé-

tecte au moins deux quantités relatives à la performance de combustion desdits brûleurs et on com- 35

mande chacun desdits étages de combustion en fonction des valeurs détectées desdites deux quan-

tités. 40

45

50

55

60

65

70

75

80

85

90

95

100

105

110

115

120

125

130

135

140

145

150

155

160

165

170

175

180

185

190

195

200

205

210

215

220

225

230

235

240

245

250

255

260

265

270

275

280

285

290

295

300

305

310

315

320

325

330

335

340

345

350

355

360

365

370

375

380

385

390

395

400

405

410

415

420

425

430

435

440

445

450

455

460

465

470

475

480

485

490

495

500

505

510

515

520

525

530

535

540

545

550

555

560

565

570

575

580

585

590

595

600

605

610

615

620

625

630

635

640

645

650

655

660

665

670

675

680

685

690

695

700

705

710

715

720

725

730

735

740

745

750

755

760

765

770

775

780

785

790

795

800

805

810

815

820

825

830

835

840

845

850

855

860

865

870

875

880

885

890

895

900

905

910

915

920

925

930

935

940

945

950

955

960

965

970

975

980

985

990

995

1000

1005

1010

1015

1020

1025

1030

1035

1040

1045

1050

1055

1060

1065

1070

1075

1080

1085

1090

1095

1100

1105

1110

1115

1120

1125

1130

1135

1140

1145

1150

1155

1160

1165

1170

1175

1180

1185

1190

1195

1200

1205

1210

1215

1220

1225

1230

1235

1240

1245

1250

1255

1260

1265

1270

1275

1280

1285

1290

1295

1300

1305

1310

1315

1320

1325

1330

1335

1340

1345

1350

1355

1360

1365

1370


1375


1380


1385

1390

1395

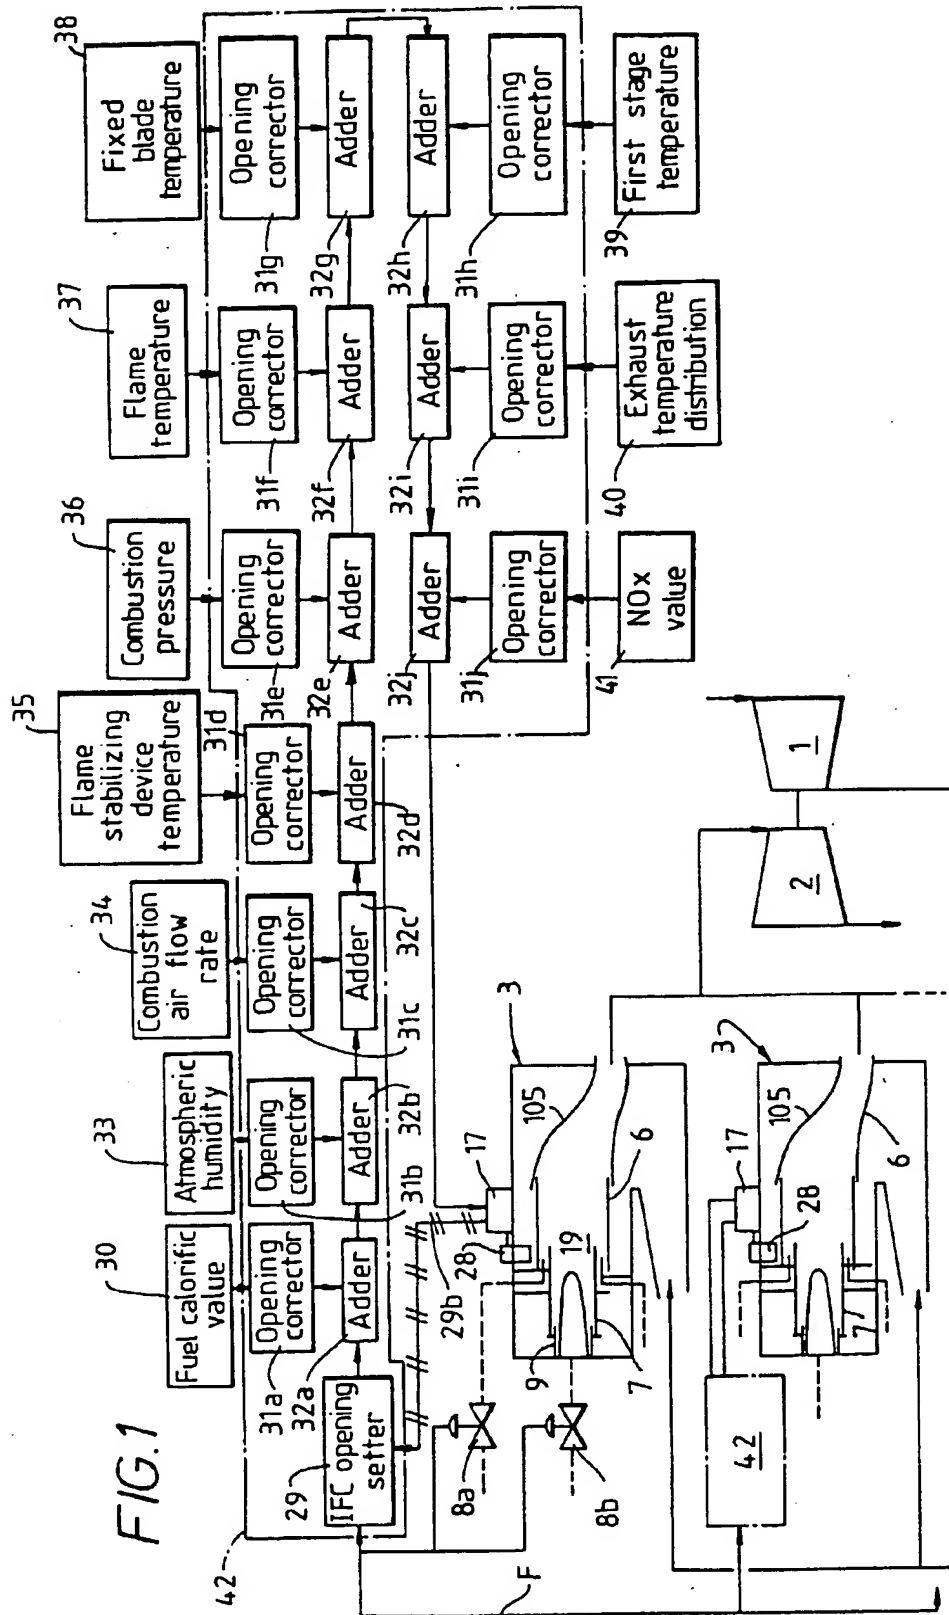

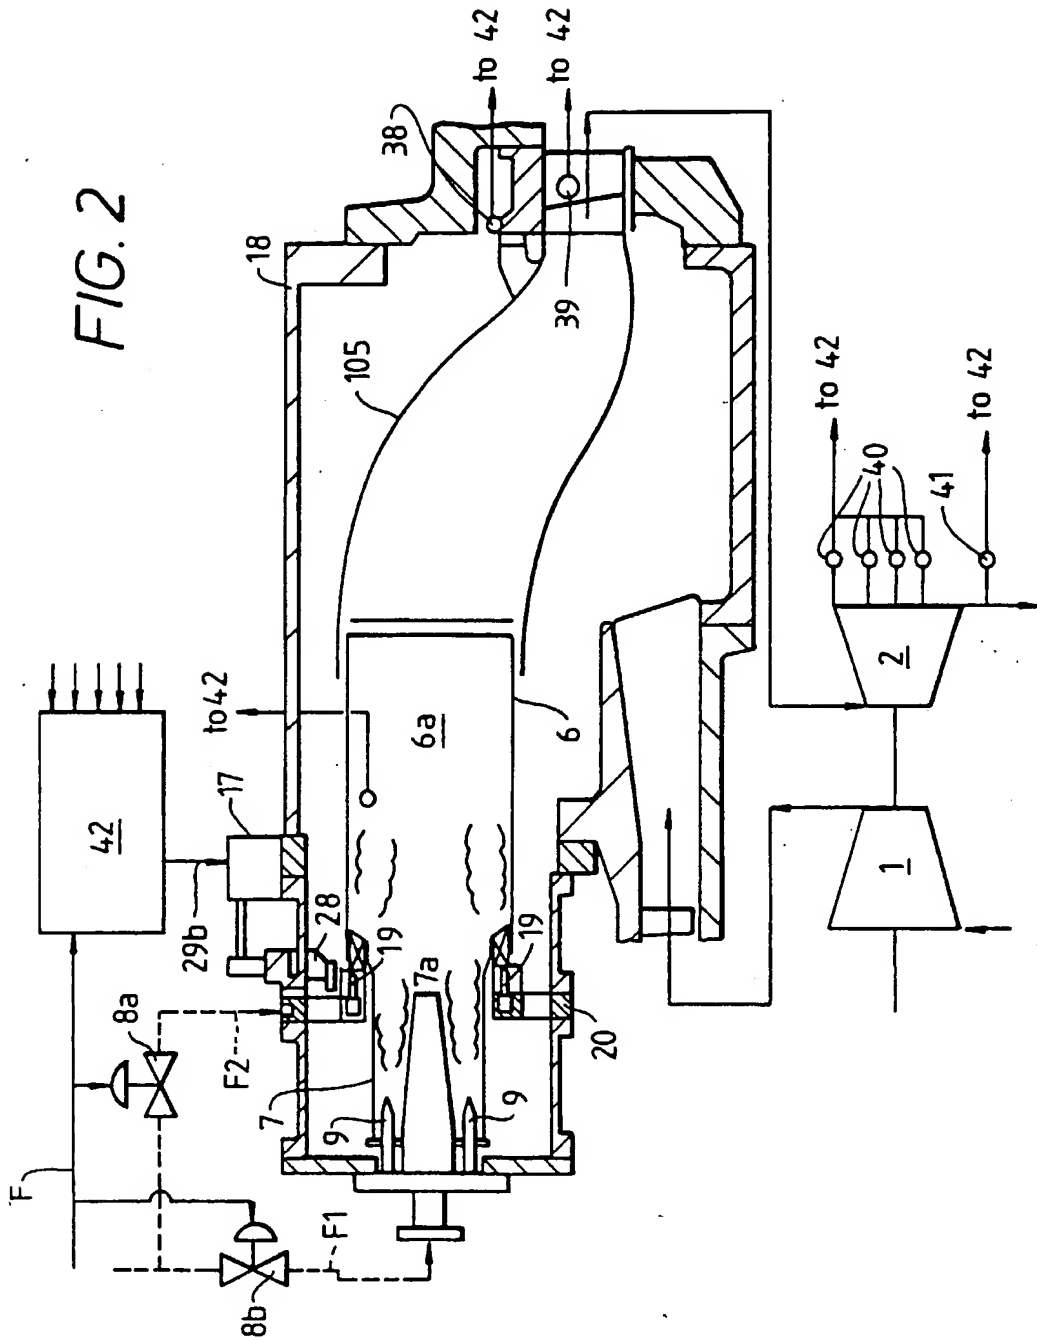

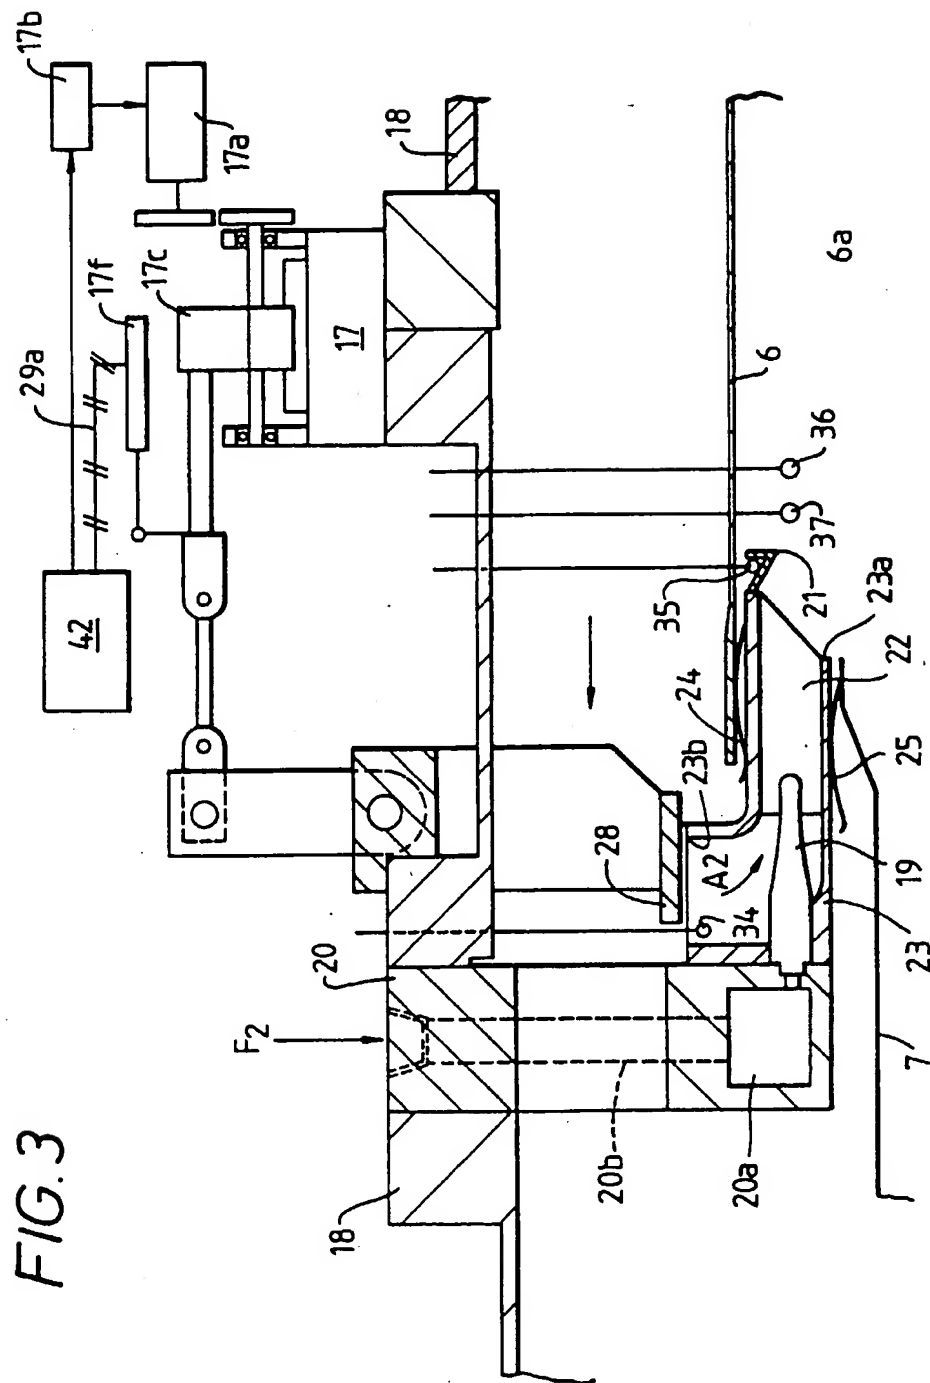

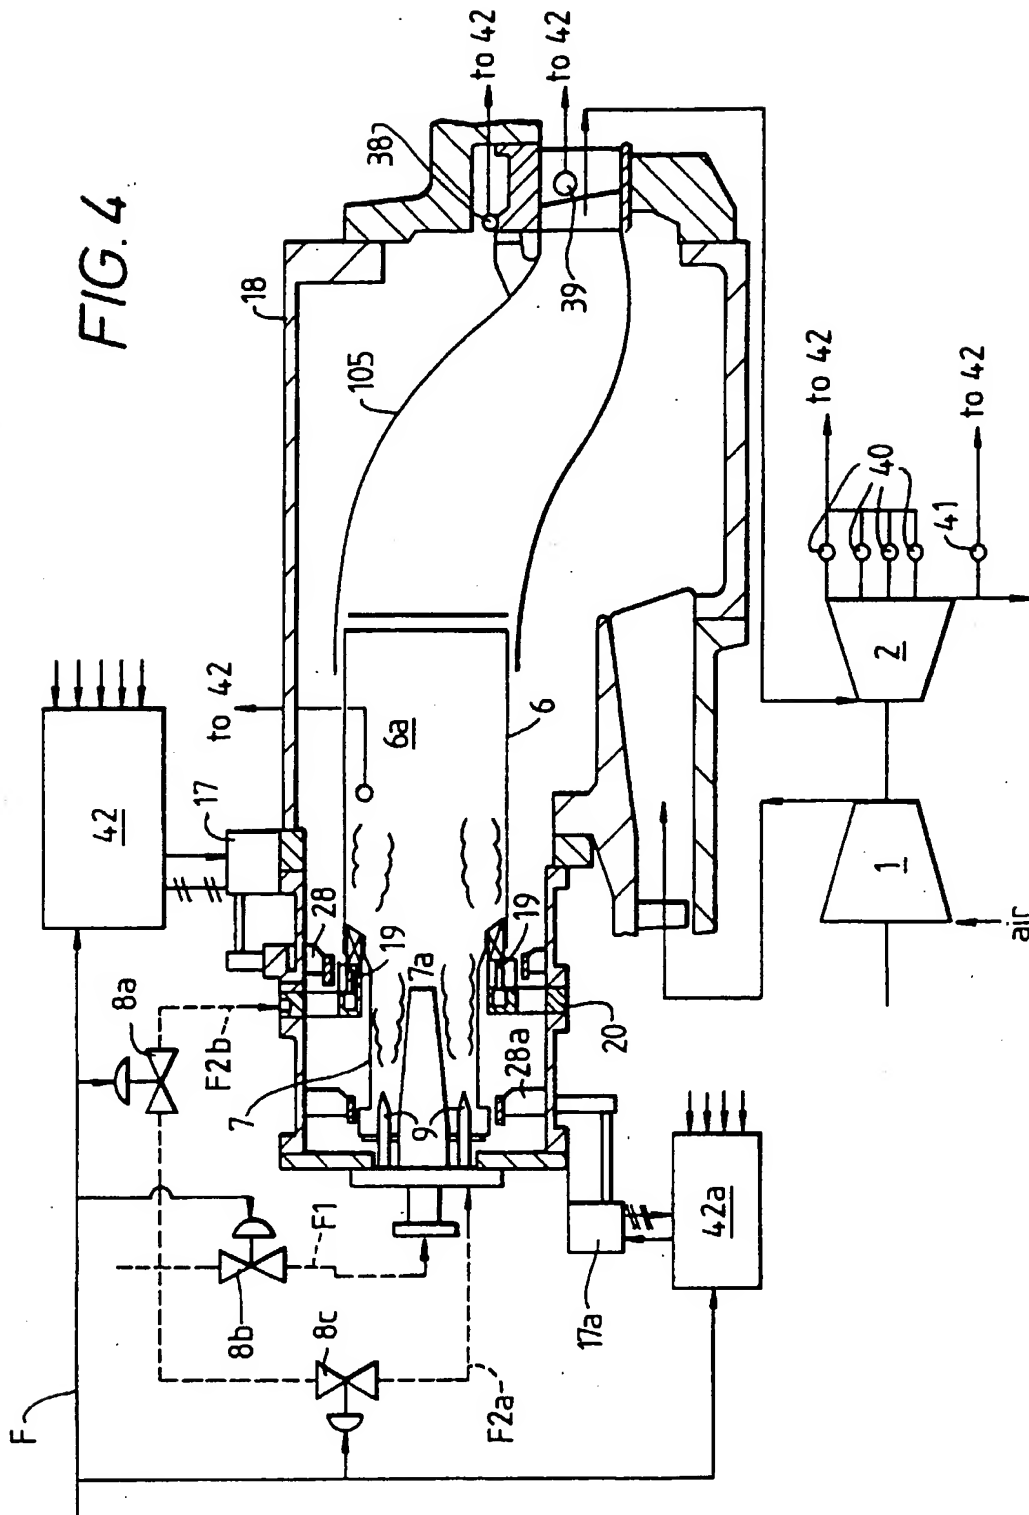
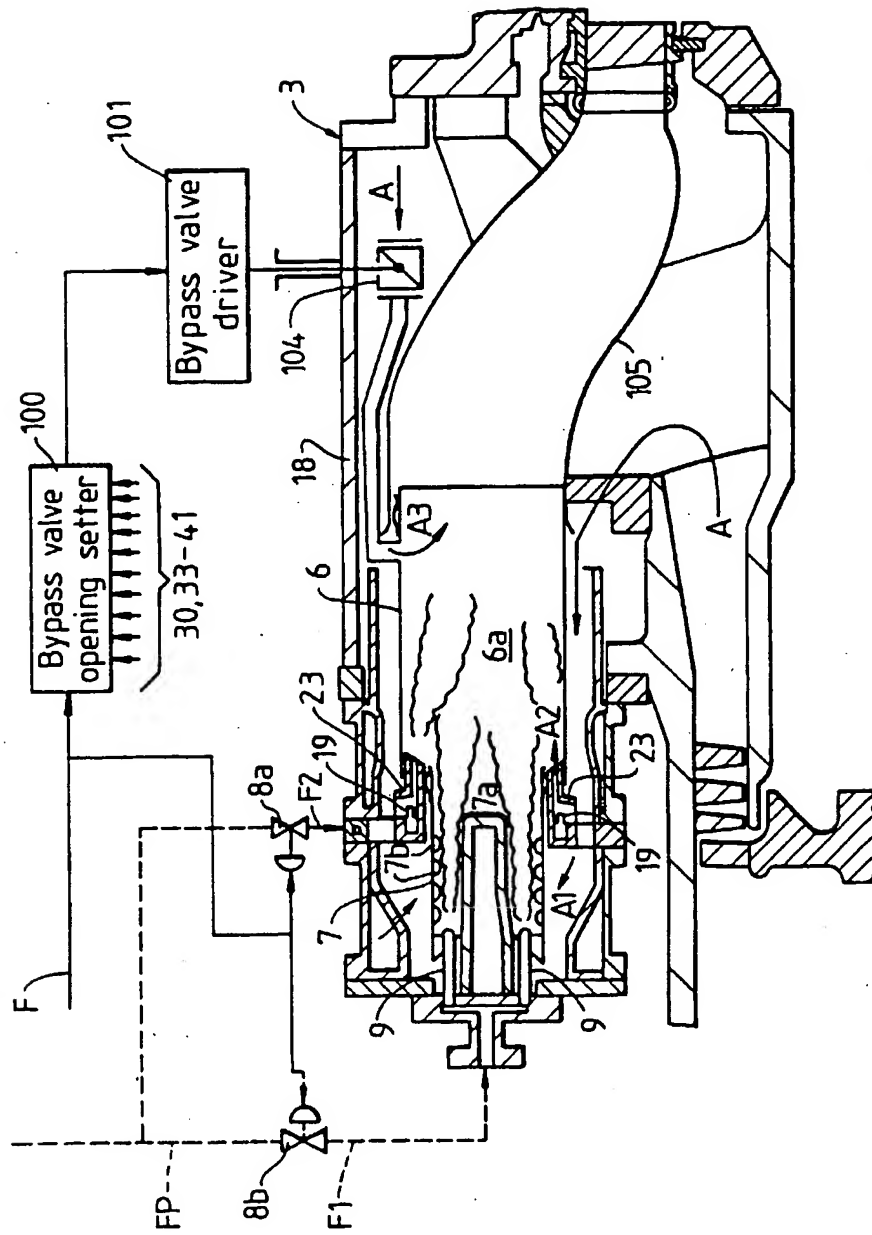
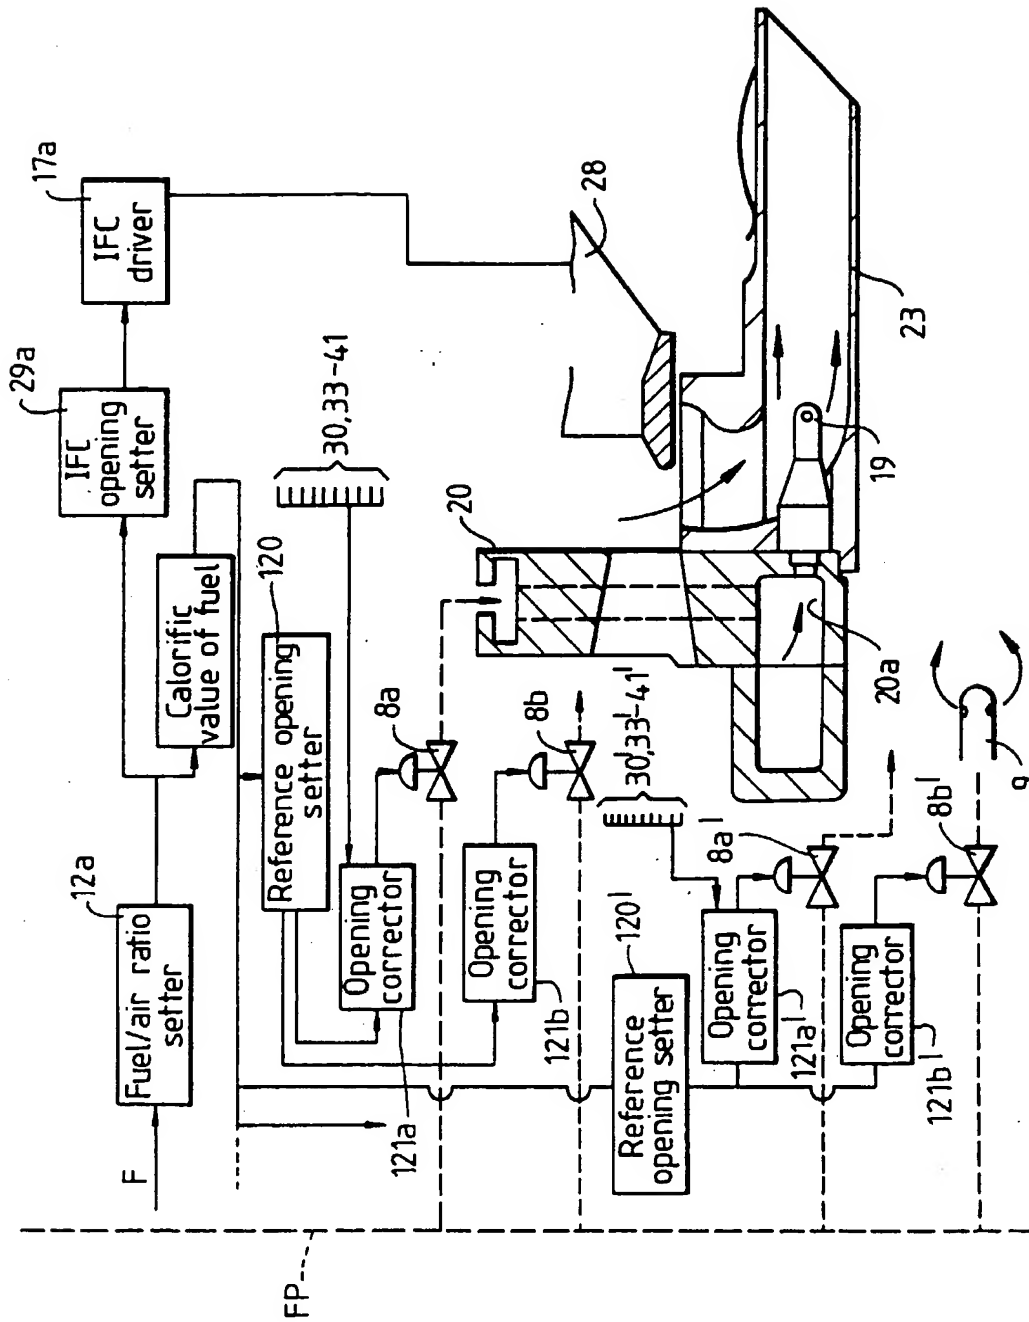


FIG. 5





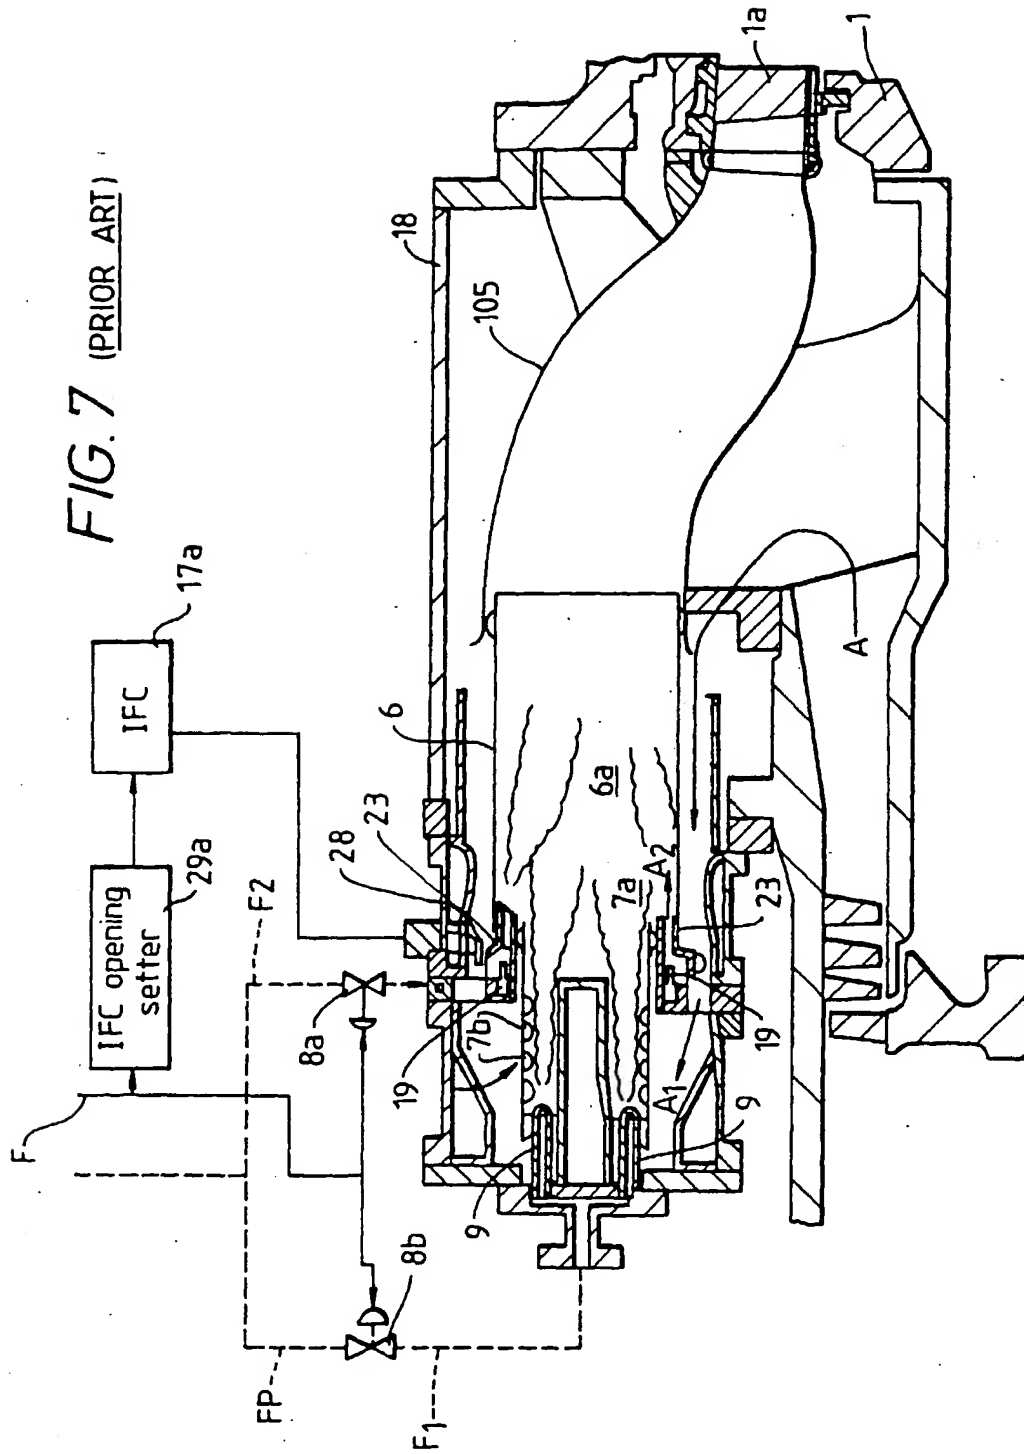


FIG. 8 (PRIOR ART)

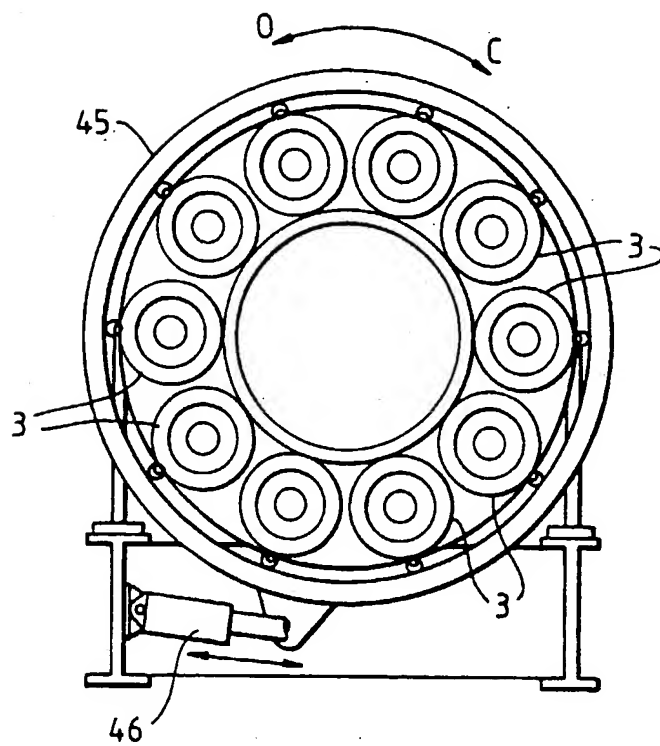


FIG. 9 (PRIOR ART)

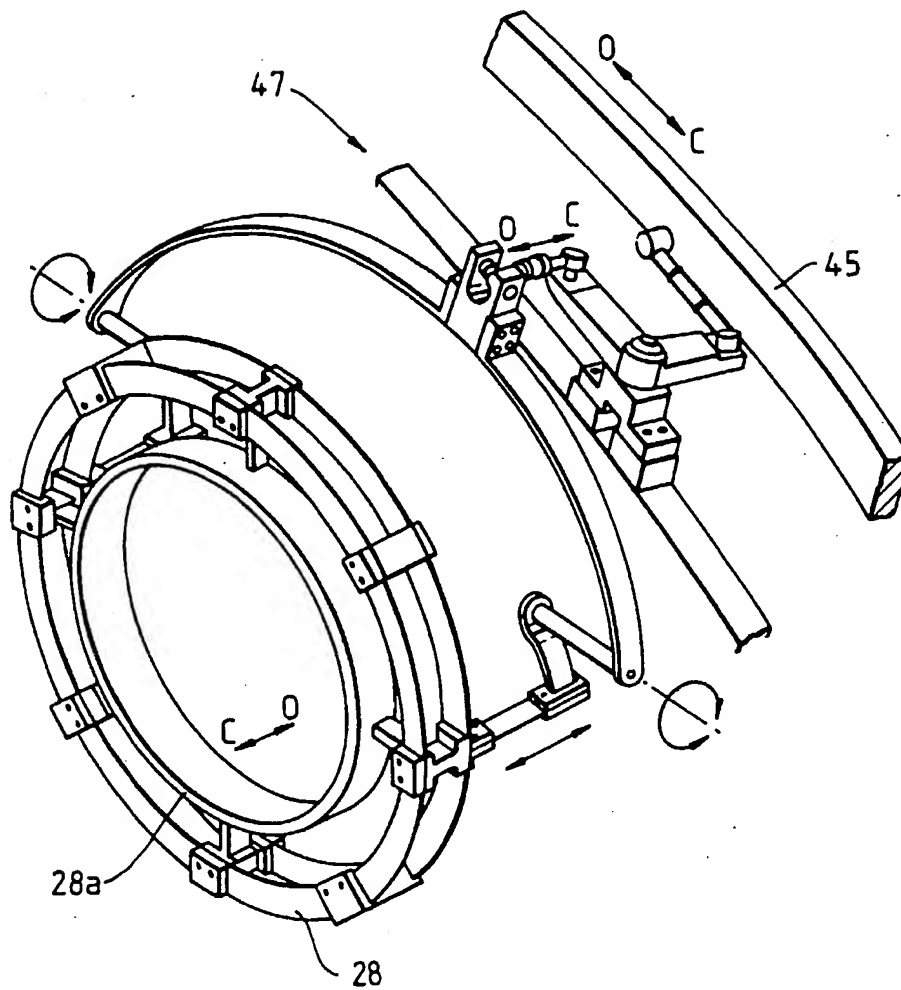


FIG. 10 (PRIOR ART.)

